

# Fujitsu-DataCore Storage Virtualization Appliance

## Installation Manual - Rebuild from a Backup




### Installation Procedure


1. Plug in Power-Cords to the Appliance (Inputs shown in Yellow)
2. Connect Keyboard, Mouse and Screen (Inputs shown in red)
3. Connect LAN Port 1 (RJ45 Socket at right hand side, shown in Orange) to your corporate network and make sure a DHCP Server exists to dole out an IP Address.
4. Power On the Appliance and wait for the OS to configure itself.


5. The appliance will validate its components on first start. This could take a while, please be patient.

Select "Yes" at the below question about rebuilding from a backup.

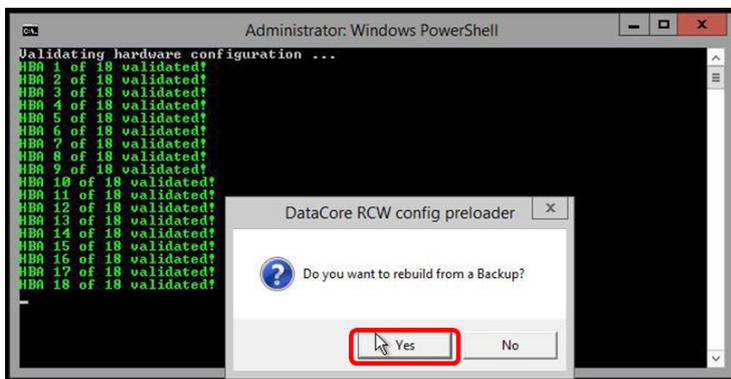


6. Provide a valid Backup File (e.g. on a USB key) and select it.

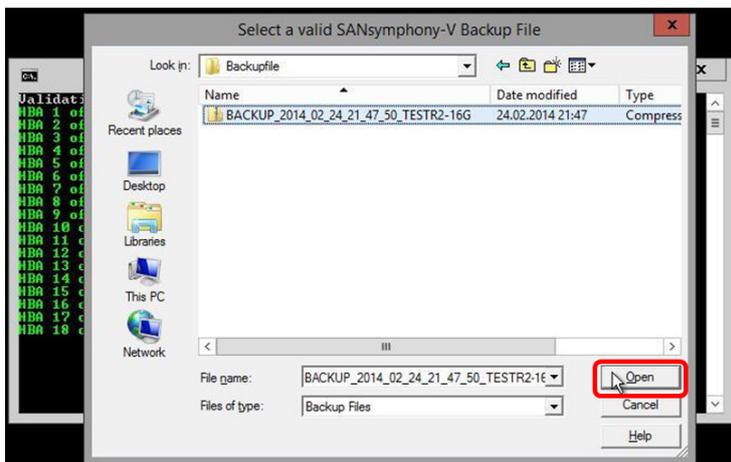

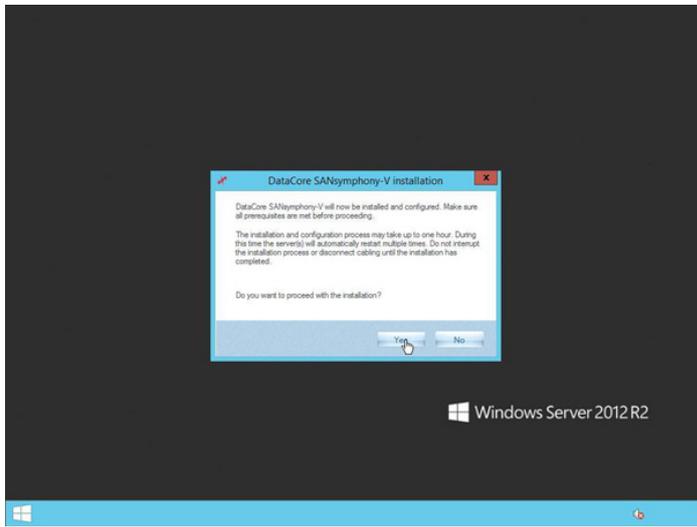


## Installation Procedure

7. Acknowledge the installation process and wait until configuration completes.

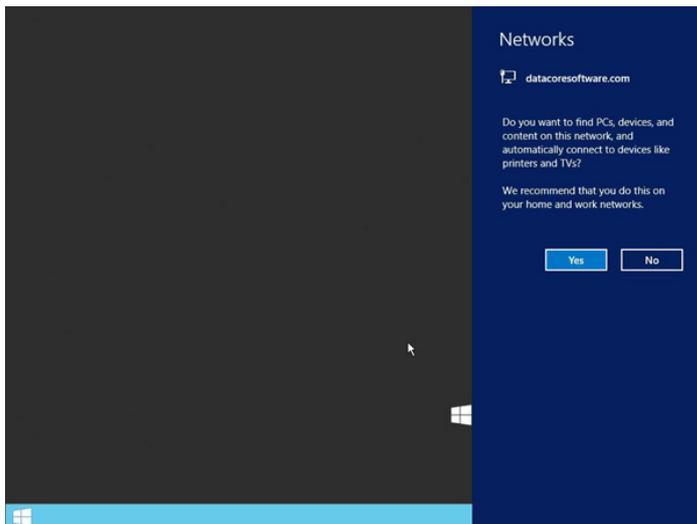


**Note:** If the following screen pops up, you can ignore it. The installation does take care of it.

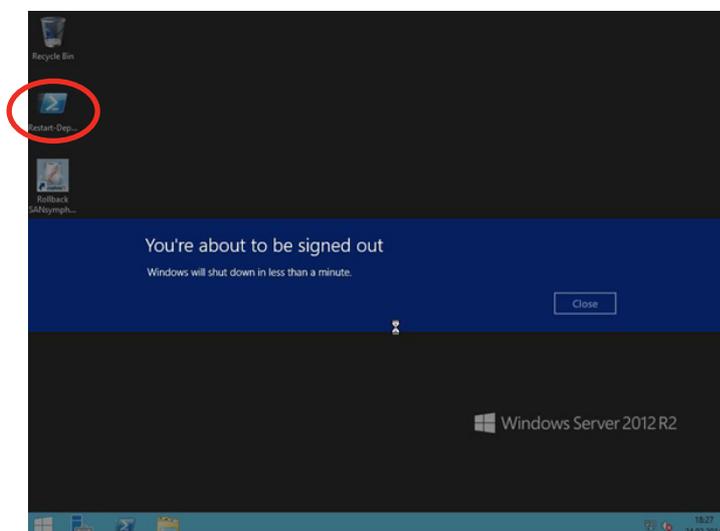

Installation takes several minutes and the appliance will reboot several times ...]

In case you accidentally interrupt the installation you can restart it by clicking on "Restart-Deployment"

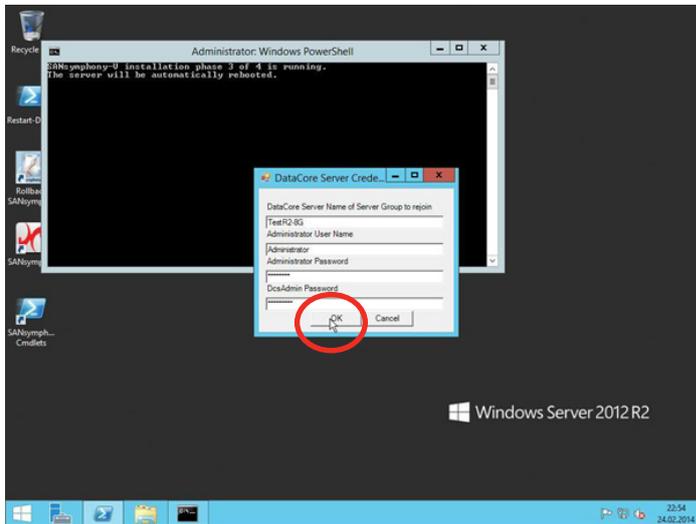


### Installation Procedure


At the end of phase 3 the recovery process will try to join back into the existing DataCore Server Group. Please provide a valid Hostname of an existing DataCore Server and credentials for Administrator and DcsAdmin and click on OK.

Default Administrator password after installation is: **DataC0re**

Default DcsAdmin password after installation is: **DataC0re!**

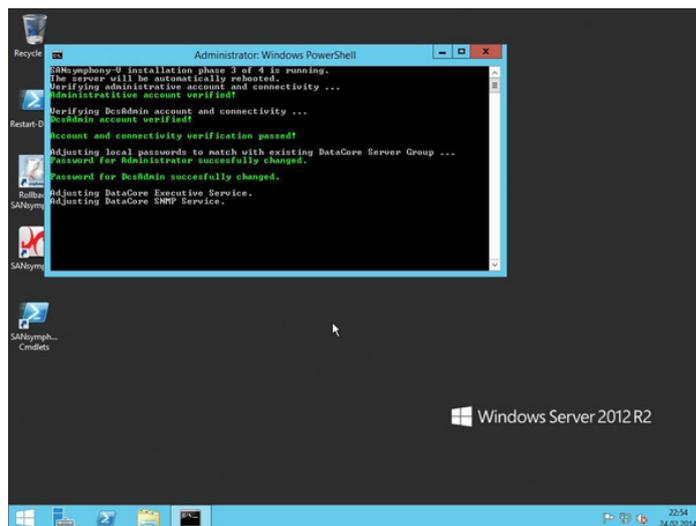


Credential Information will be verified and configuration rebuild.

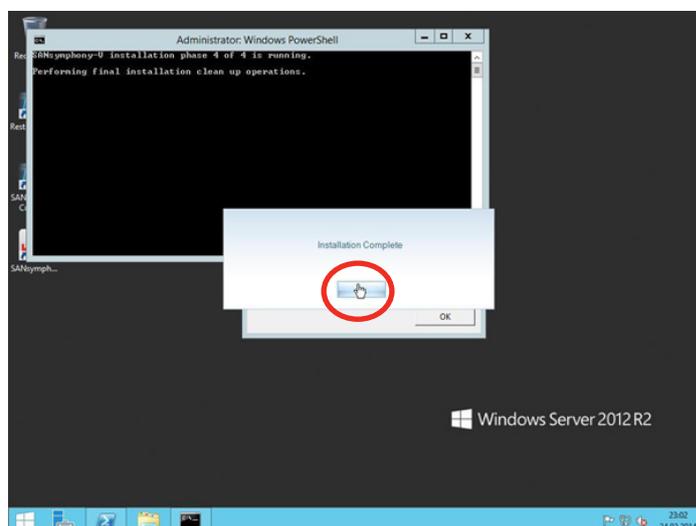


After installation has finished you should see a screen like this one.

Acknowledge SANsymphony-V installation completion by clicking on OK.

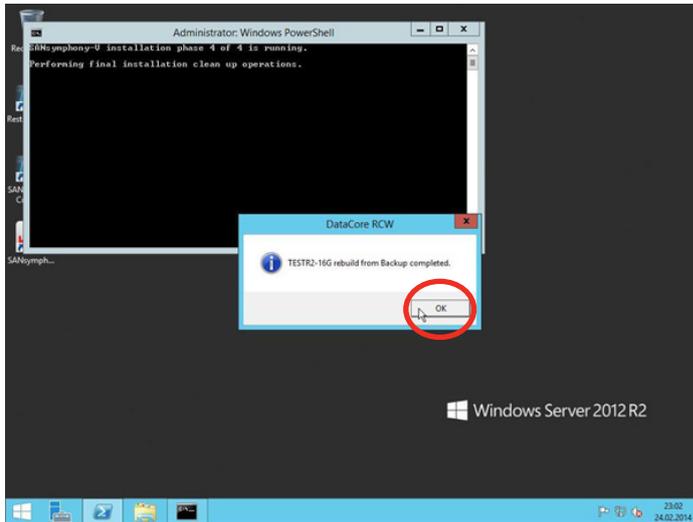


## Installation Procedure

8. Acknowledge completion of the rebuild operation by clicking on OK.

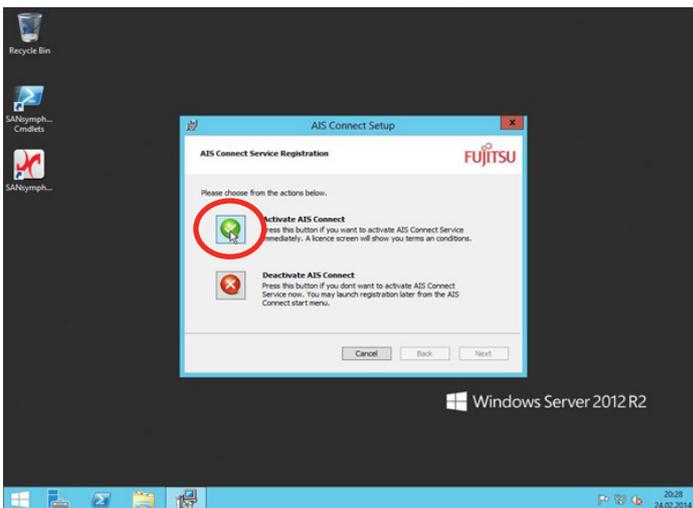

9. For activation of AIS Call home feature click on "Activate AIS Connect" and follow the Wizard (displayed on next page).

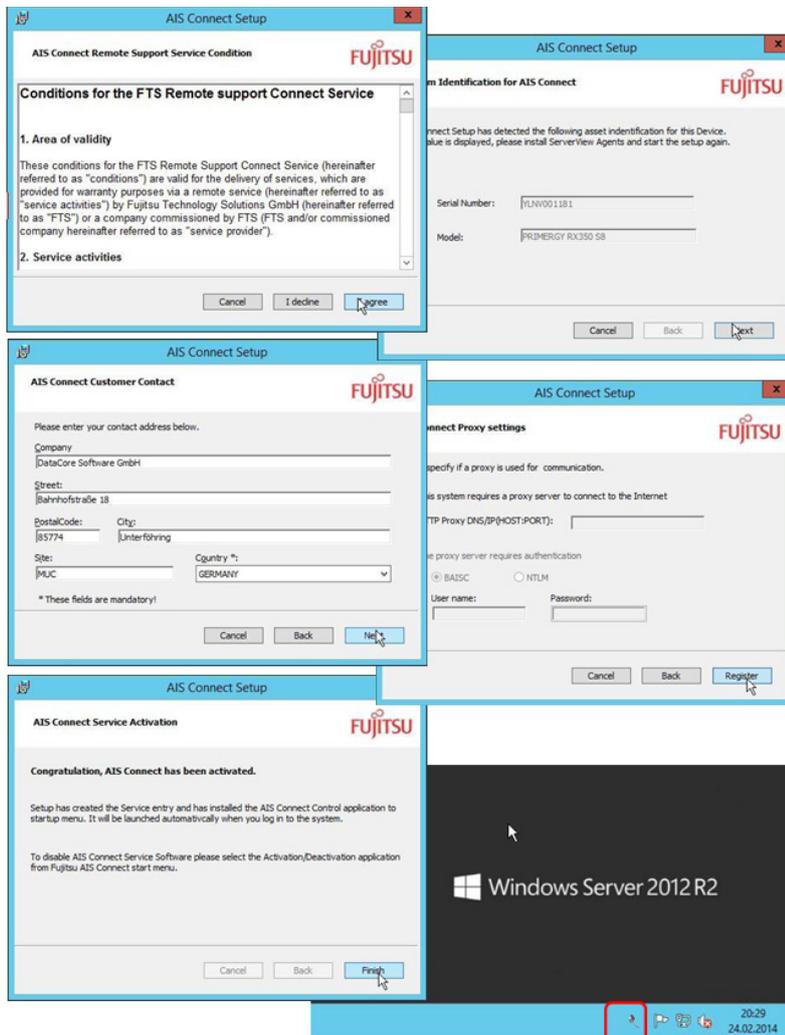

## Installation Procedure

Follow the steps of the Wizard.

When you are done, the AIS Connect icon will appear in the task tray.

**10.** Finally connect any FC Port to the FC Fabrics and eventually connect the second NIC to your corporate network.